



RAIGI CASTING RESINS

Thermal management


Potting

Adhesives

Gap pads

Gasketing


Electrical insulation

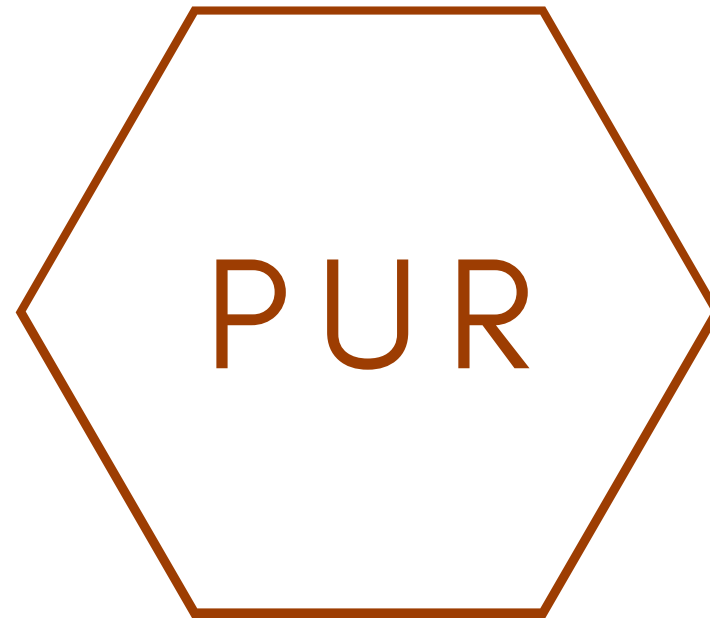

R8809 / F

Its advantages


- Strong efficiency against flammability (completed UL94 V0 test (1,5 mm))
- Good adhesive capacity
- Does not contain halogen
- Application: potting / PCB protection
- Colour : Black

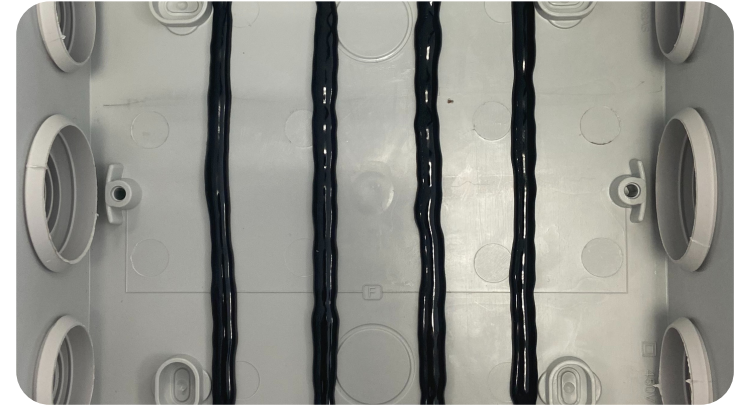

R8710 / F

Its advantages

- Strong efficiency against flammability
- Has completed UL94-V0 test (1,5 mm)
- Easy application thanks to long gel time
- Strong adhesive capacity
- Does not contain halogen
- Application : potting / PCB protection
- Colour : Beige

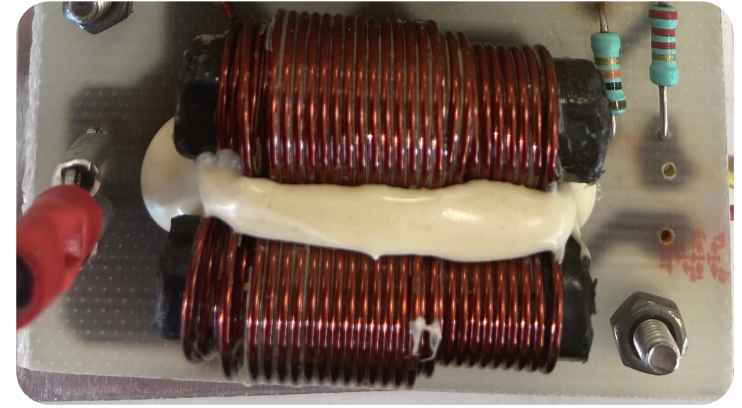


J7709 / F

Its advantages

- High thermal conductive capacities
- Colour : Grey

Applications

- Batteries
- Automotive
- Electronic

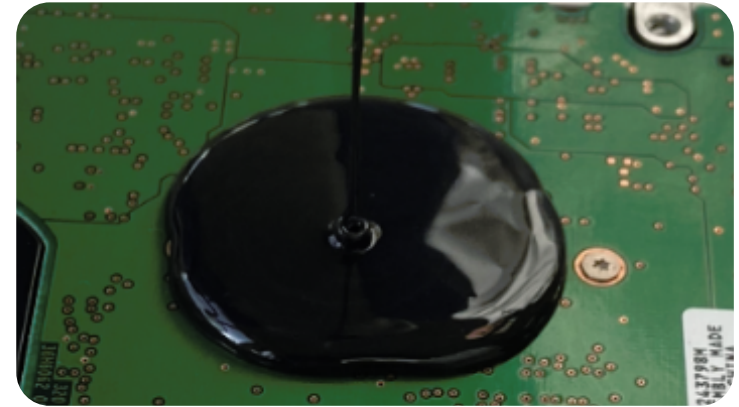


R9429 / F

Its advantages

- Rigid material
- Easy to use (100/50 mixing ratio)
- Possible to use in bi-component cartridge
- Excellent thermal shocks resistance (> 100 cycles : -40°C; +140°C)
- Excellent adhesive capacity on plastic and metal
- Quick polymerisation
- Low shrinkage
- Colour : black

Applications

- Transformers & winding encapsulation

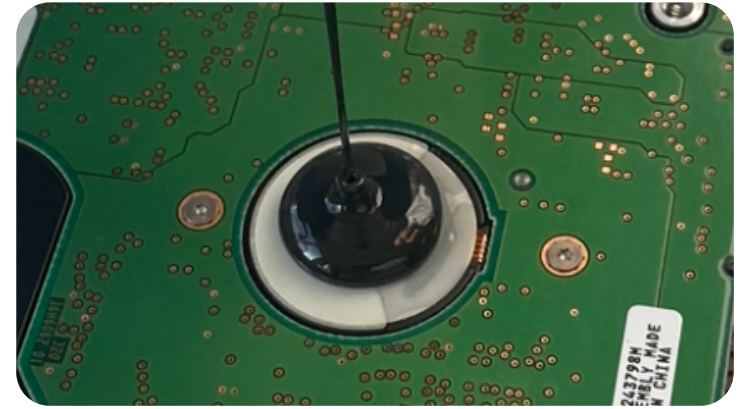


R9209-200

Its advantages

- Rigid material
- Thixotropic system after mixing
- Easy to use (2:1 ratio)
- Short gel time and quick polymerization even in small quantities
- Excellent thermal shocks resistance (> 100 cycles : -40°C; +140°C)
- Excellent adhesive capacity on plastic and metal
- Colour : Black

Applications

- PCB Protection

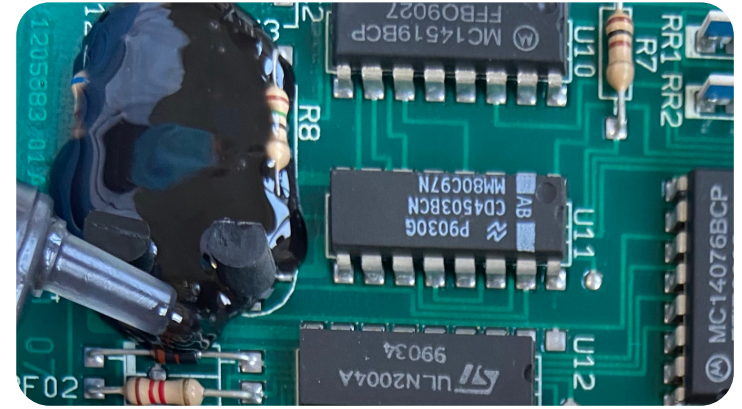

Packaging

From :

- 50 ml (cartridges)
- Some liters (bi-bags or drums from one to 200 kg)
- Until 1 000 kg (container)



Contact



raigi@raigi.com



+33 2 37 33 30 40



11 Rue de la Chapelle, 28310 Rouvray-Saint-Denis